


GSM DOG TRAINING COLLAR

GS-100 MODEL

CONTENTS

The following items are included in the package, as shown on the photo below; GSM dog training collar, USB charger, USB wire, USB adapter, pair of short probes and magnet.

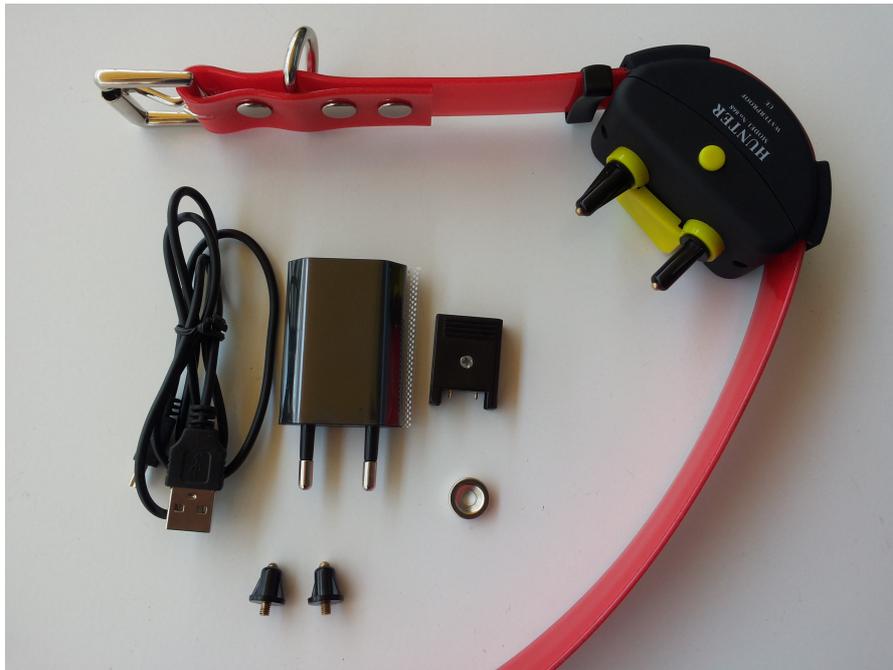

PREPARING THE GSM DOG TRAINING COLLAR FOR FIRST TIME USE



The dog training collar needs a SIM card in order to function. In addition, it needs to be charged for 5-6 hours. A fully charged battery, provides an autonomy of 36 hours (standby).

As you can see on the photo above, the plastic cover of the dog training collar has two screws. Unscrew these two screws and open the plastic cover, in order to insert the SIM card. The PIN of the SIM card must be deactivated, and the SIM card should have credit. After the insertion of the SIM card, close the plastic cover and screw the two screws tightly, so that the two plastic parts fix tightly. It is very important to fix them tightly, so that the dog training collar will be totally waterproof (IP67).

Now, you can charge the dog training collar. Connect the small USB adapter to the USB wire, and the USB wire to the USB charger. Then, connect the charger to the dog training collar as it is shown on the photos below. Lift the yellow rubber protective cover, and connect the charger. When the charger is connected to the dog training collar, the red indication light is constantly on showing that the device is charging. The GSM dog training collar should be charged while it is switched off.



ACTIVATION AND USE OF THE GSM DOG TRAINING COLLAR

In order to switch on the GSM dog training collar, use the magnet provided. Hold the magnet for one second, at the point where the indication light is. Then, remove the magnet. The collar switches on, a beep is heard and the red indication light, initially flashes quickly, and then slower. If the red light flashes slower indicates that there is GSM network, and the training collar is ready to be used. The specific dog training collar, has an unlimited range due to the GSM network. (subject to network availability)

Now, you can call the dog training collar, using your mobile phone. When the line opens, the built-in microphone is activated, and you can hear your dog's voice. You can send the desired command (tone, stimulation) to the GSM dog training collar using the keypad of your mobile phone.

If you press key "0", a tone command is sent only.

If you press key "1", a tone command along with a stimulation command (level 1) is sent. This is the **lowest** stimulation level.

If you press key "2", a tone command along with a stimulation command (level 2) is sent.

If you press key "3", a tone command along with a stimulation command (level 3) is sent.

If you press key "4", a tone command along with a stimulation command (level 4) is sent.

If you press key "5", a tone command along with a stimulation command (level 5) is sent.

If you press key "6", a tone command along with a stimulation command (level 6) is sent.

If you press key "7", a tone command along with a stimulation command (level 7) is sent. This is the **highest** stimulation level.

It is advised, after you have corrected your dog's behavior, to drop the line from your mobile, in order to avoid any unwanted charges to your mobile, and to preserve the battery autonomy of the dog training collar.

In order to switch off the GSM dog training collar, use the magnet provided. Hold the magnet for one second, at the point where the indication light is. Then, remove the magnet. The indication light stops flashing, and the GSM dog training collar switches off.

TIPS & FITTING OF THE GSM DOG TRAINING COLLAR

The GSM dog training collar, has been specially designed for hunting dogs and can function under hard conditions (rain, dense vegetation). It has a lightweight durable design, and it is suitable for all dogs, either small or big.

The GSM dog training collar, should be placed under your dog's neck. The two probes should touch the skin of your dog, so that your dog will receive the stimulation. The dog training collar should be fitted tightly to your dog's neck. If your dog has a long fur, it is advised to trim the fur a little, so the two probes can directly contact the skin of the dog.

You should find the correct stimulation level for your dog. You will start with level 1 stimulation

(lowest). If you see no reaction from your dog, use level 2 stimulation. Increase the stimulation level until you see a reaction from your dog. When you see a reaction from your dog, this is the correct stimulation level that you should use.

If you use level 7 stimulation (highest), and you do not see any reaction from your dog, then the dog training collar has not been fitted correctly. It should be fitted tightly to your dog's neck. If your dog has a long fur, you should trim a little the fur, at the place where the two probes contact the skin.

Use the short or long probes provided depending on the dog's fur

It is advised to charge your GSM dog training collar, prior to each use.

WARRANTY

We offer one-year warranty, and quick service after its end. The warranty does not cover the built-in rechargeable battery.